

10/25/00

Jc891 U.S. PTO

PTO/SB/05 (Modified)

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.

95-449

First Named Inventor or
Application Identifier:

NUSSBAUM

Title: Arrangement for Providing International Prompts
in a Unified Messaging System

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent
application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 22]
3. ☒ Formal Drawing(s) (35 USC 113) [Total Sheets: 5]
4. ☐ Oath or Declaration [Total Pages:]
 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Other: Appendix [Total Pages: 8]

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: /

18. CORRESPONDENCE ADDRESS

Leon R. Turkevich, Esq.
CUSTOMER NO.: 23164
2000 M Street, N.W., 7th Floor
Washington, D.C. 20036-3307



23164

PATENT TRADEMARK OFFICE

Name (Type)

Leon R. Turkevich

Registration No.
(Att./Agent)

34,035

Signature

Date

October 25, 2000

UNITED STATES UTILITY PATENT APPLICATION

FOR

ARRANGEMENT FOR PROVIDING INTERNATIONAL PROMPTS
IN A UNIFIED MESSAGING SYSTEM

INVENTOR:

Paul Alton Nussbaum of Midlothian, Virginia

PREPARED BY:

Leon R. Turkevich, Esq.
2000 M STREET, N.W., 7th Floor
WASHINGTON, D.C. 20036-3307
(202) 261-1059

ARRANGEMENT FOR PROVIDING INTERNATIONAL PROMPTS IN A UNIFIED MESSAGING SYSTEM

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to an arrangement for providing international prompts in automated voice response systems such as unified communications systems.

DESCRIPTION OF THE RELATED ART

5 The evolution of the public switched telephone network has resulted in a variety of voice applications and services that can be provided to individual subscribers and business subscribers. Such services include voice messaging systems that enable landline or wireless subscribers to record, playback, and forward voice mail messages. One such example includes unified communications systems that provide messaging services for users by providing an integrated platform for the storage and retrieval of different types of messages, such as voicemail, e-mail, fax, etc.

10 One particularly desirable feature for automated voice response systems would be the ability to develop and deliver new voice prompts in new languages. A voice prompt is pre-recorded speech that is played back to a user as part of an audible user interface of an application. It is usually recorded by an actor or voice model in a professional studio based on a pre-authored script. The voice prompts are then digitized and stored in electronic format before they are used by an interactive voice response application.

15 Most voice prompts are stored as whole sentences, referred to as whole sentence prompts, that contain no context sensitive information. These whole sentence prompts have the advantage that the prompt sounds more professional and the voice model can more easily record a professional version of the prompt if it is a whole sentence. Whole sentence prompts also are easier to manage, as the text script of the prompt often reveals its usage in the audio user interface (UI).

20 In addition, whole sentence prompts do not use context sensitive aspects (e.g., variables) because use of such context sensitive aspects may be unclear and their meaning ambiguous; for example, "Do you want to delete it?" may be ambiguous, whereas "Do you want to delete the message?" is more readily understood and does not assume context sensitive definition of the direct

object "it". Hence, whole sentence prompts without context sensitive information can almost always be directly translated into any another language as a complete sentence with no context sensitive information.

Whole sentence prompts, however, cannot be used to convey variables or context sensitive information, such as date, time, or number of messages. Hence, concatenated prompts (also referred to as sentence fragments, phrases, simple phrases, compound phrases, tabular prompts, variable prompts, etc.) are needed to convey information having variables or context information. Examples of concatenated prompts include "You have five new messages," as well as "Good Morning," which might need to be chosen from a group of possible phrases depending on the time of day.

Unfortunately, concatenated prompts cause difficulties in generating a complete sentence, especially when attempting to develop multiple language systems for international deployment. For example, different languages have different agreement rules (gender, tense, plurality, etc. ex: one message, two messages). In addition, some words are pronounced differently if they appear next to other words (precede a word beginning with a vowel, etc. ex: a fax, an address). Homonyms are different in different languages, affecting re-use of prompt segments. Context also is very important to translating a prompt, hence the translator needs to see all the possible sentences a prompt will be used in.

Translation typically requires printing of a script of the translated prompt for review, and for use by the voice model to speak aloud in the studio. The script must be written in the character set of the language, as transliteration into European character sets is not useful. Often an expensive combination of computer, operating system, and word processing software is the only way of reasonably producing such documents in character sets such as Arabic, Japanese, etc..

In view of these issues, a linguist typically is needed to develop the script (and possibly test the end result) for the proposed prompts. Moreover, a word (or phrase's) meaning also is very important to prompt script writing, hence the linguist needs to understand the concepts being discussed in the prompts (e.g., often a linguist doesn't know what a distribution list is, etc.).

Generic systems, such as illustrated in U.S. Patent No. 5,724,406 to Juster, are configured for providing generic scripting for a messaging application; however, these generic systems are advantageous only if nearly all of the prompts of the messaging system are concatenated prompts.

Moreover, these generic systems still require a programmer to carefully coordinate with a linguist for each new language.

Another proposed concept suggests use of data structures (e.g., tables) to select prescribed components for a concatenated prompt in a corresponding selected language. For example, Figures 1A through 1D are diagrams illustrating data structures 10 for respective prescribed concatenated prompts having multiple components 12 selected for prescribed languages 14. In particular, the components 12 are divided from the prescribed concatenated prompt according to grammatical constructs for the corresponding language 14. For example, the prescribed concatenated prompt represented in the table 10a (“You have # messages”) according to the English language 14a differs from the grammatical structure (“In your mailbox # message you have”) according to the Japanese language 14b, and the grammatical structure (“You have message # message”) according to the Thai language 14c. If a component 12 (e.g., 12b in the English language 14a) is to be skipped for a certain language, a skip character (“-”) is used to designate that the unit should be skipped.

The tables 10 may also be used to describe genders, or other language components used to modify a noun. For example, Latin languages tend to have genders, German and Arabic have three genders, while Russian may have six different “genders” that modify a noun, and that may vary depending on sentence position. In particular, Figures 1B, 1C, and 1D illustrate variations in representing time expressions: tables 10b, 10c, and 10d illustrate the expression “at 12:15 AM” in AM/PM format, 24-hour format, and “quarter to” format, respectively.

Unfortunately, the above data structures 10 provide only a conceptual description of organizing prompts, and do not provide sufficient information for implementation and deployment of a commercially viable messaging system. For example, implementation concerns include the manner in which the tables are stored and accessed, selection of entries within each column, and storage of the data structures in the accompanying audio prompts. In particular, the above data structures need to be implemented in an efficient manner that ensures that redundant data is minimized, and that CPU resources are efficiently utilized.

SUMMARY OF THE INVENTION

There is a need for an arrangement that enables deployment of international prompts in a voice messaging system with efficient utilization of CPU resources and minimal redundant data, including minimal redundant stored audio prompts.

There also is a need for an arrangement that enables prompts in different languages to be added to a voice messaging system with minimal coordination between a linguist and a programmer of the voice messaging system.

These and other needs are attained by the present invention, where a server is configured for dynamically generating a selected concatenated prompt, from stored prompt fragments, in a selected language. The server includes a first executable resource configured for identifying a selected concatenated prompt and a selected language, based on reception of a prompt request. The server also includes, for each of the concatenated prompts, a corresponding second executable resource selectively invoked by the first executable resource based on identification of the corresponding selected concatenated prompt, the corresponding second executable resource configured for obtaining language-independent information for the selected concatenated prompt from a first database configured for storing the language-independent information for each of a plurality of concatenated prompts. The language-independent information may include global variables necessary for generation of the selected concatenated prompt, or identification of prompt components or variable portions (e.g., time of day, number of messages, etc.). The corresponding second executable resource also is configured for identifying how specific language information is to be accessed. The first executable resource, based on execution of the corresponding selected second executable resource, accesses the language-specific information for the selected concatenated prompt, and in response generates the selected concatenated prompt in the selected language based on retrieval of the stored prompt fragments identified by the language-specific information for the selected concatenated prompt.

One aspect of the present invention provides a method in a server of generating a concatenated prompt. The method includes identifying a selected concatenated prompt and a selected language based on reception of a prompt request, and executing a selected executable

resource for the selected concatenated prompt. The selected executable resource obtains language-independent information for the selected concatenated prompt from a database configured for storing the language-independent information for each of a plurality of concatenated prompts. Language-specific information for the selected concatenated prompt is accessed based on the obtained language-independent information for the selected concatenated prompt. The selected concatenated prompt is generated in the selected language based on selective retrieval of stored prompt fragments identified by the language-specific information for the selected concatenated prompt. The execution of a selected executable resource for operations including obtaining language-independent information for the selected concatenated prompt enables deployment of a prompt generation architecture having language independent information separate from language-specific information, facilitating the addition of new languages to the existing server. In addition, the separation of language independent information from language-specific information enables the presence of redundant data to be minimized. Finally, the separation of language independent information from language-specific information enables additional concatenated prompts to be added, often with minimal additions to the language-specific or the stored prompt fragments.

Another aspect of the present invention provides a server system configured for dynamically generating a selected concatenated prompt in a selected language from stored prompt fragments. The server system includes a first executable resource configured for identifying a selected one of a plurality of concatenated prompts and a selected one of a plurality of languages, based on reception of a prompt request. The server also includes second executable resources configured for accessing language-independent information for the concatenated prompts, respectively. The first executable resource configured is for initiating execution of a corresponding selected one of the second executable resources based on identification of the corresponding selected concatenated prompt, and the selected second executable resource is configured for locating language-specific information for the corresponding selected concatenated prompt based on accessing the corresponding language-independent information. The server system also includes a first database for storage of stored prompt fragments. The first executable resource accesses the language-specific information for the selected concatenated prompt based on location thereof by the corresponding selected second executable resource, and the first executable resource generates the selected concatenated prompt

in the selected language based on retrieval of a selected group of the stored prompt fragments identified by the language-specific information for the selected concatenated prompt.

Additional advantages and novel features of the invention will be set forth in part in the description which follows and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The advantages of the present invention may be realized and attained by means of instrumentalities and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Reference is made to the attached drawings, wherein elements having the same reference numeral designations represent like elements throughout and wherein:

Figures 1A, 1B, 1C, and 1D are diagrams (prior art) illustrating data structures used to select prescribed components for a concatenated prompt.

Figure 2 is a diagram of a server system configured for dynamically generating a selected concatenated prompt in a selected language according to an embodiment of the present invention.

Figure 3 is a diagram illustrating a table that specifies a prompt structure for a prescribed concatenated prompt for playback of time entries.

Figures 4A and 4B are diagrams illustrating concatenated prompts generated using nested concatenated prompts according to an embodiment of the present invention.

Figure 5 is a diagram illustrating the method of generating a concatenated prompt according to an embodiment of the present action.

BEST MODE FOR CARRYING OUT THE INVENTION

Figure 2 is a block diagram illustrating a system configured for dynamically generating voice based prompts, including whole sentence prompts and concatenated prompts, in a selected language according to an embodiment of the present invention. The server-based system typically is implemented as part of a unified messaging system such as the commercially available

Cisco Unified Open Network Exchange (Cisco uOne) (Products UONE-FOUND 4.1S, and UONE-VOICEMSG4.1S) from Cisco Systems, Inc.

The system 10 includes an application runtime environment core 12, configured for executing the received requests by execution of a messaging application. The application runtime environment core 12 is implemented as an executable resource, for example as a server executing a PHP hypertext processor with extensible markup language (XML) parsing and processing capabilities, available open source at <http://www.php.net>. As described below, the application runtime environment core 12 is configured for identifying a selected prompt, for example a concatenated prompt, and a selected language based on reception of a prompt request, for example from the unified messaging application.

The server based system 10 has an architecture based on the concatenated prompts that are dynamically generated. In particular, the server based system includes a collection of PHP- based executable scripts (i.e., PHP3 script software) 14 stored on a tangible medium, where a concatenated prompt that can be dynamically generated by the core has an associated executable script stored within the collection 14. In addition, the server based system 10 includes a database 16 configured for storing text-based files (e.g., XML files) for each of the concatenated prompts. In particular, each XML file stored in the database 16 specifies language-independent information for the corresponding concatenated prompt, for example the stored prompt fragments are used to make up the concatenated prompt, the variables (e.g., time, date, quantity) are used to choose variable portions of the prompt, and how specific language information is to be accessed. Hence, each concatenated prompt to be generated by the application runtime core 12 has a corresponding executable script within the collection 14, and a corresponding XML document stored in the database 16 and providing language-independent information related to the concatenated prompt.

The server based system 10 also includes at least one additional database 17 configured for storage of language-specific information. As illustrated in Figure 2, the database 17 uses a directory-based structure for storage of language-specific information, where directories 18a, 18b, and 18c are configured for storing language-specific information for languages A, B, and C, respectively. Each directory 18 is configured for storing language-specific information such as whole sentence prompts 20, concatenated prompt fragments 22, and XML files 24. Each whole sentence prompt 20 is stored,

for example, as an audio file such as a .wav file, and represents a complete sentence expression. The concatenated prompt fragments 22 are stored as audio files, such as .wav files, and may represent a single word or even a portion of a word. Each XML document 24 stored in the corresponding language directory 18 provides language-specific information for a corresponding concatenated prompt, described below.

Hence, the application runtime environment core 12 executes a selected script from the collection 14 for retrieval of the corresponding language-independent information from a selected XML document from the database 16 for a corresponding selected concatenated prompt. Once the language-independent information has been obtained for a corresponding selected concatenated prompt, the selected script from the collection 14 accesses the language-specific information from the XML document 24 corresponding to the selected concatenated prompt within the directory (e.g., 18a) corresponding to the selected language. As described below, the hierarchal access of language-independent information based on the concatenated prompt, followed by retrieval of the language-specific information for the concatenated prompt, provides flexibility in design and deployment of concatenated prompt generation systems for multiple languages.

Figure 5 is a diagram illustrating the method by the server system 10 of dynamically generating a concatenated prompt according to an embodiment of the present invention. The method can be implemented as executable code stored on a computer readable medium (e.g., a hard disk drive, a floppy drive, a random access memory, a read only memory, an EPROM, a compact disc, etc.).

The method begins in step 30, where the application runtime environment core 12 receives a request for a prompt. In response to receiving a request, the application runtime environment core 12 identifies whether the prompt is a whole sentence prompt or concatenated prompt, and identifies the language in step 32. If the prompt is a whole sentence prompt, the application runtime environment core 12 merely retrieves the stored whole sentence prompt 20 from the appropriate language directory 18, and presents the whole sentence prompt 20 for playback in step 34.

However, if the prompt is a concatenated prompt, then the server system 10 needs to dynamically generate the concatenated prompt. The application runtime environment core 12 executes a selected script from the collection 14 that corresponds to the selected concatenated prompt

in step 36. The selected executable script accesses the XML file for the corresponding selected concatenated prompt from the database 16 in step 38 for retrieval of language-independent information related to the corresponding selected concatenated prompt, described in detail below. The selected executable script also uses in step 40 the language specific data contained in the XML file 24 in order to identify the .wav files to be used for the audio presentation of the concatenated prompt, and/or any text components to be used for generating a text-based prompt.

The disclosed embodiment stores the XML documents 16 and 24 as data structures for storing language-independent information and language-specific information, respectively. In particular, the XML documents 16 and 24 expand on the conceptual descriptions of the data structures illustrated in Figures 1A, 1B, 1C and 1D to provide a system that can be deployed and efficiently managed with minimal CPU resources, or minimal modifications necessary by a programmer. Moreover, minimal interaction is required between a linguist and a programmer in adding additional languages.

The XML documents 16 and 24 are written based on local and/or global variables loaded by the application runtime environment core 12. In particular, the application runtime environment core 12 and the PHP script 14 obtain pointers to necessary files based on parsing the selected XML documents. Hence, data structures such as illustrated in Figures 3 and 4 that are used to define the domain of available concatenated prompts are implemented as XML documents 16 and 24, illustrated in the attached appendix.

For example, pages 1-2 of the attached Appendix illustrate a language-specific XML document 24 used to define the concatenated phrase “at 1:45 PM” in English, and pages 3-4 of the attached Appendix illustrate another language-specific XML document 24 used to define the same concatenated phrase “at 1:45PM” in Spanish. Each language-specific XML document includes a breakdown of the concatenated sentence prompt for that language, pointers to the individual .wav files to playback in various combinations, and the text (in Unicode as necessary) of that language suitable for display in a web browser configured to display text and that language. As shown on pages 1 and 2 of the attached Appendix, the language-specific XML document (as well as every XML document) includes a document type descriptor that specifies that each document has a Menu

Variables section and an Options section. As illustrated above with respect to Figure 1, the phrase “at 1:45 PM” can be theoretically be divided into seven parts:

(at) (-) (one) (-) (forty-five) (PM) (-).

This seven part structure is used within each of the XML documents 24 that define the concept “at 1:45 PM” in the respective language directories 18. For example, the XML document specifying the English language version of “at 1:45 PM” on pages 1-2 of the attached Appendix, and the XML document specifying the Spanish language version of “at 1:45 PM” on pages 3-4 to the attached Appendix, both specify seven possible Menu Variables (e.g., “Menu Variables name = 1-7”).

Each menu variable describes one of the parts of the concatenated sentence where each part is read left to right, Part 1 to Part N, regardless of language. The corresponding value specifies the number of .wav files that are available for the corresponding menu variable: as shown on Page 1 of the attached Appendix, the menu variables name “1” has a value of “26”, indicating the XML document has 26 entries available for the corresponding value (note, however, that each entry of Options name = 1_0-25 specifies the same .wav value); however, the menu variables name “2” has a value of “0”, indicating that the corresponding part of the concatenated prompt does not have any .wav files for the corresponding language. Hence, the XML document on pages 1 and 2 of the attached Appendix specify from the menu variables that the parts 2, 4, and 7 are unused (as illustrated by Menu Variables name = 2/4/7, value = “0”), hence contain zero .wav files.

As illustrated in Figure 3, there are 60 possible .wav files for representing minutes; hence, part 5 of the concatenated prompt “at 1:45 PM” specifies 60 available .wav files. Note that all the languages for this particular concatenated prompt “at 1:45 PM” will also have 60 .wav files, as illustrated by the XML tag “<Menu Variables name = “5”, value = “60”/>” for both the English version XML document on pages 1-2 and the Spanish version XML document on pages 3-4 of the attached Appendix.

The Options section of the language specific XML documents on pages 1-4 of the attached Appendix specify the .wav files to be used in the corresponding parts of the concatenated sentence prompt. For example, the English version XML document on pages 1-2 of the Appendix specifies English language .wav files (USENG_...), and the Spanish version XML document on pages 3-4 of the Appendix specifies the Spanish language .wav files (SASPAN_...). If the concatenated prompt

“at 1:45 PM” has an unused part, then there are no .wav files specified for the unused part, as illustrated in the English version XML document by the absence of any options entries for parts 2, 4, or 7. Hence, the Options “1_0” through “1_25” specify the .wav files for the expression “at”, “3_0” through “3_25” specify the .wav files for the appropriate hour, “5_0” through “5_59” specify the .wav files for the appropriate minute, and “6_0” through “6_25” specify the .wav files for the appropriate use of “AM” or “PM”.

The language-independent XML file for each concatenated prompt, stored in the database 16, stores the rules and pointers that point to the appropriate executable PHP3 software within the collection 14 for generation of the corresponding concatenated prompt. Examples of the language-independent XML files stored in the database 16 are illustrated on pages 5-6 of the attached Appendix.

Each language-independent XML file 16 contains a pointer to the PHP3 executable procedure (or C code function) that will process the variables and formulate the concatenated sentence prompt in the chosen language. Using the above time example for the concatenated phrase “at 1:45 PM”, exemplary variables accessed by the language-independent XML files include time of day and the language to use.

The language-independent XML document illustrated at the top of page 5 of the Appendix illustrates the language-independent XML document to be executed for generating the concatenated prompt “at 1:45 PM”. The menu variable specifies a procedure (the name of the PHP3 script) stored in the collection 14 to be executed in order to gather the correct .wav files in the correct order for the chosen language. The options field specifies how many parts the concatenated prompt has been divided into: as described above, the concatenated prompt “at 1:45 PM” is divided into seven parts, independent of the language to be used. The text field of the options field specifies the name of the language-specific XML document 24 to be accessed from the corresponding language directory (e.g., 18a); in other words, each language-specific XML document for a given concatenated prompt has the same file name, hence the appropriate language-specific XML document 24 is accessed by first locating the appropriate language directory, and obtaining the language-specific XML document 24 by file name. Hence, multiple languages can easily be added by duplicating the file names of the

language-specific XML documents, and storing the language-specific XML documents having the duplicate file names in respective language directories as illustrated in Figure 2.

Page 5 of the attached Appendix illustrates XML files 16 for two concatenated prompts: one that plays the time using AM/PM format, and another that plays the time using 24-hour format. Hence, if the prompt request received by the core 12 specifies that the user prefers AM/PM format, the core 12 accesses the top XML file that specifies 7 parts, and the language-specific XML file “LSCP_AT_AMPMTIME.xml”; if the prompt request received by the core 12 specifies that the user prefers 24 hour format, the core 12 accesses the bottom XML file that specifies 4 parts, and the language-specific XML file “LSCP_AT_24TIME.xml”.

Page 6 of the attached Appendix illustrates another language-independent XML file 16 used by the application runtime environment core 12 to select at run time the format which the time will be read (e.g., based on a subscriber selectable preference field). In this case, the procedure call “choose_and_play_at_time.proc” will not only playback the concatenated prompt, it will also choose one of the three available formats to play the concatenated prompt. The choice is based on an internal variable that has been set up prior to calling the function, for example a per subscriber configurable preference value.

Figures 4A and 4B are diagrams illustrating nested prompt fragments that may be reused for multiple concatenated prompts. For example, an English concatenated prompt may read “the message received at 1:45 PM”, and a corresponding Japanese prompt may read “at 1:45 PM the Message was received.” In both languages, it may be desirable to reuse the language-specific information for the time expression (“at 1:45PM”) in other concatenated sentence prompt, such as “fax will be sent at 1:45PM”, or in Japanese, “At 1:45PM the fax will be sent.”

Hence, nested language-specific XML documents 24 may be used to describe concatenated prompt that share concatenated sentence fragments prompt with other concatenated sentences.

Page 7 of the attached Appendix illustrates an English language version and a Japanese language version of language-specific XML documents 24, stored in their respective language directories 18, for the concatenated prompt “message received”. In particular, each XML document on Page 7 specifies only two parts, where each part has only one option. Although the first part of the English language version specifies a .wav file (USENG_MSG_RECEIVED.wav), the second

part of the English language version specifies a language-independent XML file (“GCP_AT_TIME.xml”), where “GCP” specifies generic concatenated sentence information for language-independent information. In contrast, the Japanese-specific XML document on the bottom of Page 7 of the Appendix specifies a language-specific XML document (identified by the designation “LSCP”) that is located in the Japanese language directory 18.

The English version of the second concatenated prompt “fax will be sent at 1:45 PM” is specified by the language-specific XML document at the top of page 8 of the attached Appendix. Note that the second part of the English language-specific XML document is identical to the English-language XML document on Page 7 of the attached Appendix, indicating that the concatenated sentence prompt “at 1:45 PM” is applicable in English to both the concatenated sentence “Message received at 1:45 PM” and to “Fax will be sent at 1:45 PM”.

The Japanese language-specific XML document at the bottom of Page 8 of the attached Appendix also parallels the Japanese language-specific document at the bottom of Page 7, indicating that the concatenated sentence prompt “at 1:45 PM” in Japanese can be used as well in both concatenated sentences.

According to the disclosed embodiment, a hierarchal architecture is provided where concatenated prompts are dynamically generated by first obtaining language-independent information relating to the selected concatenated prompt, followed by retrieval of language-specific information for generation of the selected concatenated prompt in the selected language, based on the obtained language-independent information. Hence, additional languages can easily be added with minimal modifications by programmers, and without the necessity of linguists to carefully coordinate with programmers. Moreover, the disclosed arrangement provides efficient CPU utilization, enabling the prompt generation system to be scalable as languages are added for international deployments.

While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

What is Claimed Is:

1. A method in a server of generating a concatenated prompt, the method comprising:
identifying a selected concatenated prompt and a selected language based on reception of a
prompt request;

executing a selected executable resource for the selected concatenated prompt;

5 obtaining, by the selected executable resource, language-independent information for the
selected concatenated prompt from a database configured for storing the language-independent
information for each of a plurality of concatenated prompts;

accessing language-specific information for the selected concatenated prompt based on the
obtained language-independent information for the selected concatenated prompt; and

10 generating the selected concatenated prompt in the selected language based on selective
retrieval of stored prompt fragments identified by the language-specific information for the selected
concatenated prompt.

2. The method of claim 1, wherein the executing step includes parsing a first XML document
corresponding to the selected concatenated prompt.

3. The method of claim 2, wherein the obtaining step includes identifying the language-
specific information based on identification of a second XML document name from the first XML
document.

4. The method of claim 3, wherein the obtaining step further includes identifying a number
of prompt fragment fields for specifying the stored prompt fragments for the corresponding selected
concatenated prompt, each of the language-specific information for the selected concatenated prompt
having a same number of prompt fragment fields, independent of the corresponding language.

5. The method of claim 3, wherein the language-specific information for the selected
concatenated prompt are stored in second XML documents based on respective languages, each of

the second XML documents corresponding to the selected concatenated prompt having a same second XML document name and stored in a corresponding language directory, the accessing step including obtaining the second XML document for the selected language based on the second XML document name in the corresponding language directory.

6. The method of claim 5, wherein the accessing step includes parsing the second XML document retrieved from the corresponding selected language directory and identifying relevant prompt fragment fields and nonrelevant prompt fragment fields from the parsed second XML document.

7. The method of claim 6, wherein the accessing step further includes identifying the stored prompt fragments for generation of the selected concatenated prompt from the parsed second XML document based on the identified relevant prompt fragment fields and determined prompt variables.

8. The method of claim 6, further comprising determining the prompt variables based on at least one of date, time, and number of messages.

9. The method of claim 7, wherein the accessing step further includes referencing a third XML document specified in the parsed second XML document that identifies nested prompt fragments utilized for multiple concatenated prompts.

10. The method of claim 1, wherein the identifying step includes parsing a first XML document configured for identifying the selected concatenated prompt from multiple available prompt based on a user preference specified in the prompt request.

11. A server system configured for dynamically generating a selected concatenated prompt in a selected language from stored prompt fragments, the server system comprising:

a first executable resource configured for identifying a selected one of a plurality of concatenated prompts and a selected one of a plurality of languages, based on reception of a prompt request;

second executable resources configured for accessing language-independent information for the concatenated prompts, respectively, the first executable resource configured for initiating execution of a corresponding selected one of the second executable resources based on identification of the corresponding selected concatenated prompt, the selected second executable resource configured for locating language-specific information for the corresponding selected concatenated prompt based on accessing the corresponding language-independent information; and

a first database for storage of stored prompt fragments, the first executable resource accessing the language-specific information for the selected concatenated prompt based on location thereof by the corresponding selected second executable resource, the first executable resource generating the selected concatenated prompt in the selected language based on retrieval of a selected group of the stored prompt fragments identified by the language-specific information for the selected concatenated prompt.

12. The system of claim 11, further comprising a second database configured for storing the language-independent information for each of the concatenated prompts, the selected second executable resource obtaining the language-independent information for the corresponding selected concatenated prompt from the second database.

13. The system of claim 12, wherein the second database is configured for storing extensible markup language (XML) documents, each XML document configured for storing at least a portion of the language-independent information for a corresponding one of the concatenated prompts.

14. The system of claim 11, wherein the first database is further configured for storage of the language-specific information for the stored prompt fragments, the first database having multiple language portions for storage of the language-specific information and the stored prompt fragments according to the respective languages.

15. The system of claim 14, wherein each language portion is configured for storing the corresponding language-specific information as XML documents.

16. The system of claim 15, wherein each language portion is further configured for storing whole sentence prompts.

17. The system of claim 15, wherein each stored prompt fragment is stored as at least one of a text file representing a text-based prompt portion, and an audio file representing an audible prompt fragment.

18. The system of claim 15, wherein each language portion corresponds to a directory, the corresponding language-specific information and the stored prompt fragments in the corresponding language being stored and respective subdirectories.

19. The system of claim 15, wherein at least one of the XML documents specifies a nested prompt fragment for use in multiple concatenated prompts.

20. The system of claim 15, wherein each XML document specifies the stored prompt fragments for selection in generating the selected concatenated prompt, pointers to audio files corresponding to the stored prompt fragments, and display text to be presented during generation of the selected concatenated prompt.

21. The system of claim 15, wherein the XML documents for the selected concatenated prompt among the respective languages each has a same filename within the corresponding language directory, and includes a same number of prompt fragment fields for specifying the stored prompt fragments in the corresponding language.

22. A computer readable medium having stored thereon sequences of instructions for generating a concatenated prompt, the sequences of instructions including instructions for performing the steps of:

identifying a selected concatenated prompt and a selected language based on reception of a prompt request;

executing a selected executable resource for the selected concatenated prompt;

obtaining, by the selected executable resource, language-independent information for the selected concatenated prompt from a database configured for storing the language-independent information for each of a plurality of concatenated prompts;

accessing language-specific information for the selected concatenated prompt based on the obtained language-independent information for the selected concatenated prompt; and

generating the selected concatenated prompt in the selected language based on selective retrieval of stored prompt fragments identified by the language-specific information for the selected concatenated prompt.

23. The medium of claim 22, wherein the executing step includes parsing a first XML document corresponding to the selected concatenated prompt.

24. The medium of claim 23, wherein the obtaining step includes identifying the language-specific information based on identification of a second XML document name from the first XML document.

25. The medium of claim 24, wherein the obtaining step further includes identifying a number of prompt fragment fields for specifying the stored prompt fragments for the corresponding selected concatenated prompt, each of the language-specific information for the selected concatenated prompt having a same number of prompt fragment fields, independent of the corresponding language.

26. The medium of claim 24, wherein the language-specific information for the selected concatenated prompt are stored in second XML documents based on respective languages, each of the second XML documents corresponding to the selected concatenated prompt having a same second XML document name and stored in a corresponding language directory, the accessing step including obtaining the second XML document for the selected language based on the second XML document name in the corresponding language directory.

27. The medium of claim 26, wherein the accessing step includes parsing the second XML document retrieved from the corresponding selected language directory and identifying relevant prompt fragment fields and nonrelevant prompt fragment fields from the parsed second XML document.

28. The medium of claim 27, wherein the accessing step further includes identifying the stored prompt fragments for generation of the selected concatenated prompt from the parsed second XML document based on the identified relevant prompt fragment fields and determined prompt variables.

29. The medium of claim 6, further comprising instructions for performing the step of determining the prompt variables based on at least one of date, time, and number of messages.

30. The medium of claim 28, wherein the accessing step further includes referencing a third XML document specified in the parsed second XML document that identifies nested prompt fragments utilized for multiple concatenated prompts.

31. The medium of claim 22, wherein the identifying step includes parsing a first XML document configured for identifying the selected concatenated prompt from multiple available prompt based on a user preference specified in the prompt request.

32. A server system configured for generating a concatenated prompt, the system comprising:

means for identifying a selected concatenated prompt and a selected language based on reception of a prompt request;

means for executing a selected executable resource for the selected concatenated prompt;

means for obtaining, by the selected executable resource, language-independent information for the selected concatenated prompt from a database configured for storing the language-independent information for each of a plurality of concatenated prompts;

means for accessing language-specific information for the selected concatenated prompt based on the obtained language-independent information for the selected concatenated prompt; and

means for generating the selected concatenated prompt in the selected language based on selective retrieval of stored prompt fragments identified by the language-specific information for the selected concatenated prompt.

33. The system of claim 32, wherein the executing means includes means for parsing a first XML document corresponding to the selected concatenated prompt.

34. The system of claim 33, wherein the obtaining means identifies the language-specific information based on identification of a second XML document name from the first XML document.

35. The system of claim 34, wherein the obtaining means identifies a number of prompt fragment fields for specifying the stored prompt fragments for the corresponding selected concatenated prompt, each of the language-specific information for the selected concatenated prompt having a same number of prompt fragment fields, independent of the corresponding language.

36. The system of claim 34, wherein the language-specific information for the selected concatenated prompt are stored in second XML documents based on respective languages, each of the second XML documents corresponding to the selected concatenated prompt having a same second XML document name and stored in a corresponding language directory, the accessing means

5 obtaining the second XML document for the selected language based on the second XML document name in the corresponding language directory.

37. The system of claim 36, wherein the accessing means parses the second XML document retrieved from the corresponding selected language directory and identifies relevant prompt fragment fields and nonrelevant prompt fragment fields from the parsed second XML document.

38. The system of claim 37, wherein the accessing means identifies the stored prompt fragments for generation of the selected concatenated prompt from the parsed second XML document based on the identified relevant prompt fragment fields and determined prompt variables.

39. The system of claim 37, further comprising means for determining the prompt variables based on at least one of date, time, and number of messages.

40. The system of claim 38, wherein the accessing means references a third XML document specified in the parsed second XML document that identifies nested prompt fragments utilized for multiple concatenated prompts.

41. The system of claim 32, wherein the identifying means parses a first XML document configured for identifying the selected concatenated prompt from multiple available prompt based on a user preference specified in the prompt request.

ARRANGEMENT FOR PROVIDING INTERNATIONAL PROMPTS IN A UNIFIED MESSAGING SYSTEM

ABSTRACT OF THE DISCLOSURE

A server is configured for dynamically generating a selected concatenated prompt, from stored prompt fragments, in a selected language. The server includes a first executable resource configured for identifying a selected concatenated prompt and a selected language, based on reception of a prompt request. The server also includes, for each of the concatenated prompts, a corresponding second executable resource selectively invoked by the first executable resource based on identification of the corresponding selected concatenated prompt, the corresponding second executable resource configured for obtaining language-independent information for the selected concatenated prompt from a first database configured for storing the language-independent information for each of a plurality of concatenated prompts. The language-independent information may include global variables necessary for generation of the selected concatenated prompt, or identification of prompt components or variable portions (e.g., time of day, number of messages, etc.). The corresponding second executable resource also is configured for identifying how specific language information is to be accessed. The first executable resource, based on execution of the corresponding selected second executable resource, accesses the language-specific information for the selected concatenated prompt, and in response generates the selected concatenated prompt in the selected language based on retrieval of the stored prompt fragments identified by the language-specific information for the selected concatenated prompt.

1	2	3	4	5	
You have	-	#	Message(s)	-	English
In your mailbox	-	#	Message	You have	Japanese
You have	Message	#	Message	-	Thai

Figure 1A (Prior Art)

Lang	Part 1	Part 2	Part 3	Part 4	Part 5	Part 6	Part 7
English	At	-	12	-	15	am	-
Span.	A las	-	doce	-	Y cuarto	De la madrugada	-
French	A	-	Minuit	-	Et quart	Du matin	-
Japan	-	Gozen	Jyuumiji	-	Jyuuyon pun	-	Ni
Germ.	Um	-	Nul uhr	-	15	-	-
Hindi	-	Raat ke	Barrah	-	Baj kar pandra minute	-	par

Figure 1B (Prior Art)


Language	Part 1	Part 2	Part 3	Part 4
English	at	Zero	Hours 15 minutes	-
Spanish	A la	Medianoche	Y cuarto	-
German	Um	Nul uhr	15	-
French	A	Minuit	15	-

Figure 1C (Prior Art)

Lang.	Part 1	Part 2	Part 3	Part 4	Part 5	Part 6	Part 7	Part 8
Eng	At	-	A quarter to	-	1	-	Am	-
Span	A la	-	-	-	1	Menos cuarto	-	-
German	Um	-	Viertel vor	-	Eins	-	Morgens	-
French	A	-	-	-	1 heure	Moins 15	Du matin	-

Figure 1D (Prior Art)

Figure 2

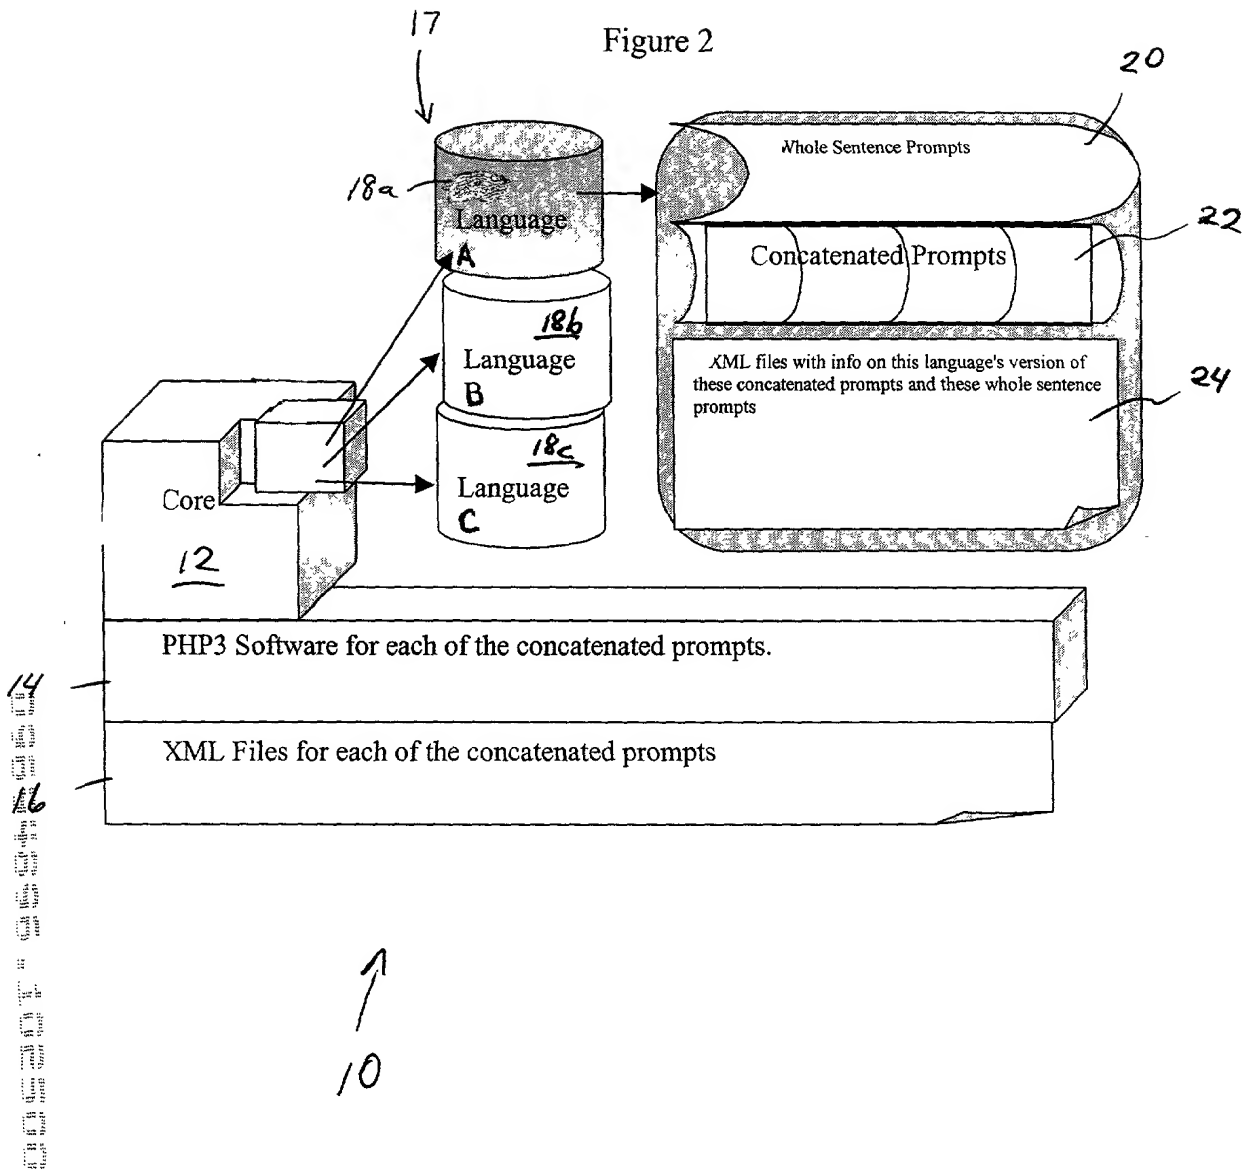

Part 1	Part 2	Part 3	Part 4
at	zero	hundred hours	-
at	zero-1	hours oh-1 minutes	-
at	zero-2	hours oh-2 minutes	-
at	zero-3	hours oh-3 minutes	-
at	zero-4	hours oh-4 minutes	-
at	zero-5	hours oh-5 minutes	-
at	zero-6	hours oh-6 minutes	-
at	zero-7	hours oh-7 minutes	-
at	zero-8	hours oh-8 minutes	-
at	zero-9	hours oh-9 minutes	-
at	10	hours 10 minutes	-
at	11	hours 11 minutes	-
at	12	hours 12 minutes	-
at	13	hours 13 minutes	-
at	14	hours 14 minutes	-
at	15	hours 15 minutes	-
at	16	hours 16 minutes	-
at	17	hours 17 minutes	-
at	18	hours 18 minutes	-
at	19	hours 19 minutes	-
at	20	hours 20 minutes	-
at	21	hours 21 minutes	-
at	22	hours 22 minutes	-
at	23	hours 23 minutes	-
at	12 hundred hours	hours 24 minutes	-
at	24 hundred hours	hours 25 minutes	-
		hours 26 minutes	
		hours 27 minutes	
		hours 28 minutes	
		hours 29 minutes	
		hours 30 minutes	
		hours 31 minutes	
		hours 32 minutes	
		hours 33 minutes	
		hours 34 minutes	
		hours 35 minutes	
		hours 36 minutes	
		hours 37 minutes	
		hours 38 minutes	
		hours 39 minutes	
		hours 40 minutes	
		hours 41 minutes	
		hours 42 minutes	
		hours 43 minutes	
		hours 44 minutes	
		hours 45 minutes	
		hours 46 minutes	
		hours 47 minutes	
		hours 48 minutes	
		hours 49 minutes	
		hours 50 minutes	
		hours 51 minutes	
		hours 52 minutes	
		hours 53 minutes	
		hours 54 minutes	
		hours 55 minutes	
		hours 56 minutes	
		hours 57 minutes	
		hours 58 minutes	
		hours 59 minutes	

Figure 3

	Part 1	Part 2
English	The Message Was Received	At 1:45 PM
Japanese	At 1:45 PM	Received Message

Figure 4A

	Part 1	Part 2
English	The Fax Will Be Sent	At 1:45 PM
Japanese	At 1:45 PM	The Fax Will Be Sent

Figure 4B

11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576
 577
 578
 579
 580
 581
 582
 583
 584
 585
 586
 587
 588
 589
 590
 591
 592
 593
 594
 595
 596
 597
 598
 599
 600
 601
 602
 603
 604
 605
 606
 607
 608
 609
 610
 611
 612
 613
 614
 615
 616
 617
 618
 619
 620
 621
 622
 623
 624
 625
 626
 627
 628
 629
 630
 631
 632
 633
 634
 635
 636
 637
 638
 639
 640
 641
 642
 643
 644
 645
 646
 647
 648
 649
 650
 651
 652
 653
 654
 655
 656
 657
 658
 659
 660
 661
 662
 663
 664
 665
 666
 667
 668
 669
 670
 671
 672
 673
 674
 675
 676
 677
 678
 679
 680
 681
 682
 683
 684
 685
 686
 687
 688
 689
 690
 691
 692
 693
 694
 695
 696
 697
 698
 699
 700
 701
 702
 703
 704
 705
 706
 707
 708
 709
 710
 711
 712
 713
 714
 715
 716
 717
 718
 719
 720
 721
 722
 723
 724
 725
 726
 727
 728
 729
 730
 731
 732
 733
 734
 735
 736
 737
 738
 739
 740
 741
 742
 743
 744
 745
 746
 747
 748
 749
 750
 751
 752
 753
 754
 755
 756
 757
 758
 759
 760
 761
 762
 763
 764
 765
 766
 767
 768
 769
 770
 771
 772
 773
 774
 775
 776
 777
 778
 779
 780
 781
 782
 783
 784
 785
 786
 787
 788
 789
 790
 791
 792
 793
 794
 795
 796
 797
 798
 799
 800
 801
 802
 803
 804
 805
 806
 807
 808
 809
 810
 811
 812
 813
 814
 815
 816
 817
 818
 819
 820
 821
 822
 823
 824
 825
 826
 827
 828
 829
 830
 831
 832
 833
 834
 835
 836
 837
 838
 839
 840
 841
 842
 843
 844
 845
 846
 847
 848
 849
 850
 851
 852
 853
 854
 855
 856
 857
 858
 859
 860
 861
 862
 863
 864
 865
 866
 867
 868
 869
 870
 871
 872
 873
 874
 875
 876
 877
 878
 879
 880
 881
 882
 883
 884
 885
 886
 887
 888
 889
 890
 891
 892
 893
 894
 895
 896
 897
 898
 899
 900
 901
 902
 903
 904
 905
 906
 907
 908
 909
 910
 911
 912
 913
 914
 915
 916
 917
 918
 919
 920
 921
 922
 923
 924
 925
 926
 927
 928
 929
 930
 931
 932
 933
 934
 935
 936
 937
 938
 939
 940
 941
 942
 943
 944
 945
 946
 947
 948
 949
 950
 951
 952
 953
 954
 955
 956
 957
 958
 959
 960
 961
 962
 963
 964
 965
 966
 967
 968
 969
 970
 971
 972
 973
 974
 975
 976
 977
 978
 979
 980
 981
 982
 983
 984
 985
 986
 987
 988
 989
 990
 991
 992
 993
 994
 995
 996
 997
 998
 999
 1000
 1001
 1002
 1003
 1004
 1005
 1006
 1007
 1008
 1009
 1010
 1011
 1012
 1013
 1014
 1015
 1016
 1017
 1018
 1019
 1020
 1021
 1022
 1023
 1024
 1025
 1026
 1027
 1028
 1029
 1030
 1031
 1032
 1033
 1034
 1035
 1036
 1037
 1038
 1039
 1040
 1041
 1042
 1043
 1044
 1045
 1046
 1047
 1048
 1049
 1050
 1051
 1052
 1053
 1054
 1055
 1056
 1057
 1058
 1059
 1060
 1061
 1062
 1063
 1064
 1065
 1066
 1067
 1068
 1069
 1070
 1071
 1072
 1073
 1074
 1075
 1076
 1077
 1078
 1079
 1080
 1081
 1082
 1083
 1084
 1085
 1086
 1087
 1088
 1089
 1090
 1091
 1092
 1093
 1094
 1095
 1096
 1097
 1098
 1099
 1100
 1101
 1102
 1103
 1104
 1105
 1106
 1107
 1108
 1109
 1110
 1111
 1112
 1113
 1114
 1115
 1116
 1117
 1118
 1119
 1120
 1121
 1122
 1123
 1124
 1125
 1126
 1127
 1128
 1129
 1130
 1131
 1132
 1133
 1134
 1135
 1136
 1137
 1138
 1139
 1140
 1141
 1142
 1143
 1144
 1145
 1146
 1147
 1148
 1149
 1150
 1151
 1152
 1153
 1154
 1155
 1156
 1157
 1158
 1159
 1160
 1161
 1162
 1163
 1164
 1165
 1166
 1167
 1168
 1169
 1170
 1171
 1172
 1173
 1174
 1175
 1176
 1177
 1178
 1179
 1180
 1181
 1182
 1183
 1184
 1185
 1186
 1187
 1188
 1189
 1190
 1191
 1192
 1193
 1194
 1195
 1196
 1197
 1198
 1199
 1200
 1201
 1202
 1203
 1204
 1205
 1206
 1207
 1208
 1209
 1210
 1211
 1212
 1213
 1214
 1215
 1216
 1217
 1218
 1219
 1220
 1221
 1222
 1223
 1224
 1225
 1226
 1227
 1228
 1229
 1230
 1231
 1232
 1233
 1234
 1235
 1236
 1237
 1238
 1239
 1240
 1241
 1242
 1243
 1244
 1245
 1246
 1247
 1248
 1249
 1250
 1251
 1252
 1253
 1254
 1255
 1256
 1257
 1258
 1259
 1260
 1261
 1262
 1263
 1264
 1265
 1266
 1267
 1268
 1269
 1270
 1271
 1272
 1273
 1274
 1275
 1276
 1277
 1278
 1279
 1280
 1281
 1282
 1283
 1284
 1285
 1286
 1287
 1288
 1289
 1290
 1291
 1292
 1293
 1294
 1295
 1296
 1297
 1298
 1299
 1300
 1301
 1302
 1303
 1304
 1305
 1306
 1307
 1308
 1309
 1310
 1311
 1312
 1313
 1314
 1315
 1316
 1317
 1318
 1319
 1320
 1321
 1322
 1323
 1324
 1325
 1326
 1327
 1328
 1329
 1330
 1331
 1332
 1333
 1334
 1335
 1336
 1337
 1338
 1339
 1340
 1341
 1342
 1343
 1344
 1345
 1346
 1347
 1348
 1349
 1350
 1351
 1352
 1353
 1354
 1355
 1356
 1357
 1358
 1359
 1360
 1361
 1362
 1363
 1364
 1365
 1366
 1367
 1368
 1369
 1370
 1371
 1372
 1373
 1374
 1375
 1376
 1377
 1378
 1379
 1380
 1381
 1382
 1383
 1384
 1385
 1386
 1387
 1388
 1389
 1390
 1391
 1392
 1393
 1394
 1395
 1396
 1397
 1398
 1399
 1400
 1401
 1402
 1403
 1404
 1405
 1406
 1407
 1408
 1409
 1410
 1411
 1412
 1413
 1414
 1415
 1416
 1417
 1418
 1419
 1420
 1421
 1422
 1423
 1424
 1425
 1426
 1427
 1428
 1429
 1430
 1431
 1432
 1433
 1434
 1435
 1436
 1437
 1438
 1439
 1440
 1441
 1442
 1443
 1444
 1445
 1446
 1447
 1448
 1449
 1450
 1451
 1452
 1453
 1454
 1455
 1456
 1457
 1458
 1459
 1460
 1461
 1462
 1463

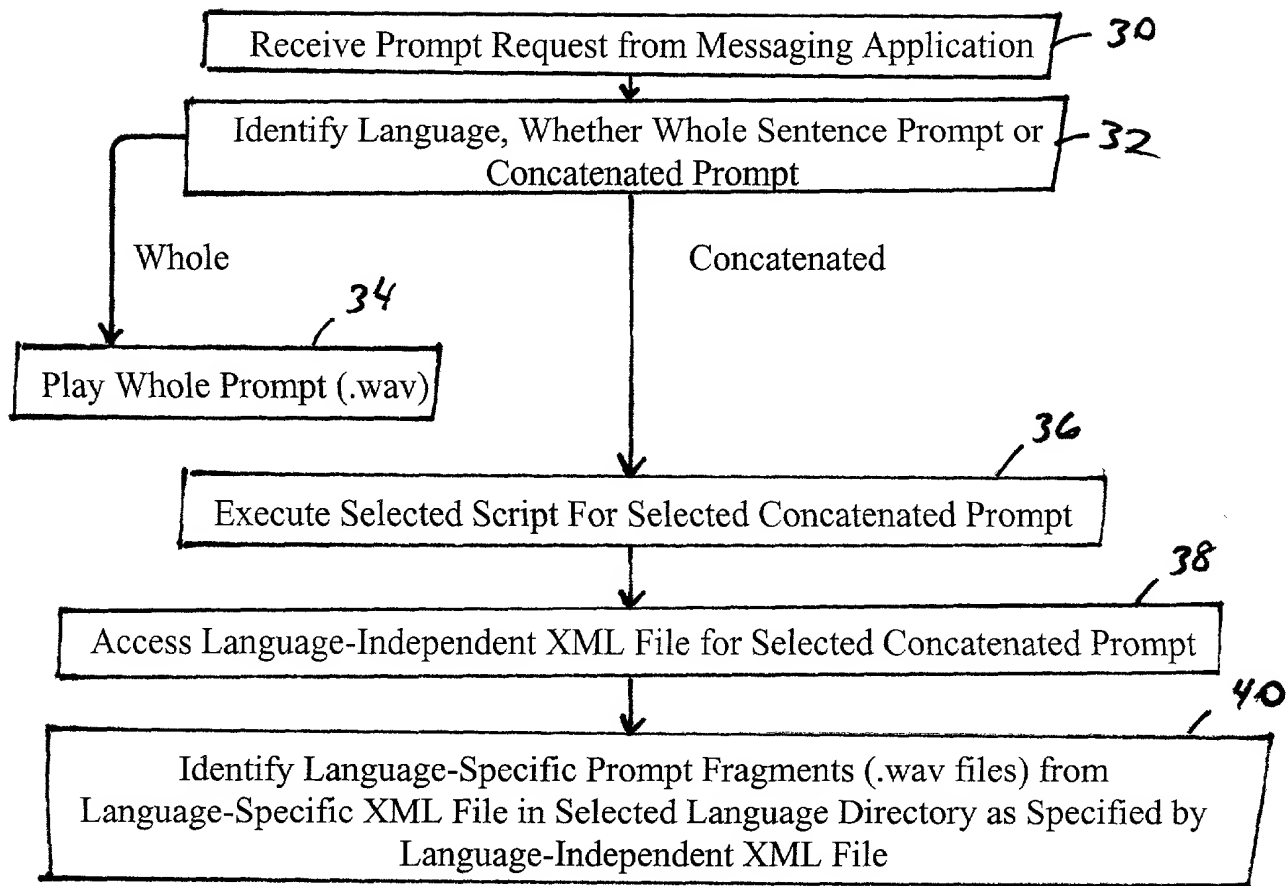


Figure 5

APPENDIX

```

<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>
  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
<DOCUMENT>
  <MenuVariables name="1"          value="26"/>
  <MenuVariables name="2"          value="0"/>
  <MenuVariables name="3"          value="26"/>
  <MenuVariables name="4"          value="0"/>
  <MenuVariables name="5"          value="60"/>
  <MenuVariables name="6"          value="26"/>
  <MenuVariables name="7"          value="0"/>
  <Options name="1_0"              value="USENG_AMPMTIME_AT.wav"    text="at"/>
  <Options name="1_1"              value="USENG_AMPMTIME_AT.wav"    text="at"/>
  <Options name="1_2"              value="USENG_AMPMTIME_AT.wav"    text="at"/>
  ...
  <Options name="1_25"             value="USENG_AMPMTIME_AT.wav"    text="at"/>
  <Options name="3_0"              value="USENG_NUMBER_12.wav"    text="12"/>
  <Options name="3_1"              value="USENG_NUMBER_1.wav"     text="1"/>
  <Options name="3_2"              value="USENG_NUMBER_2.wav"     text="2"/>
  <Options name="3_3"              value="USENG_NUMBER_3.wav"     text="3"/>
  <Options name="3_4"              value="USENG_NUMBER_4.wav"     text="4"/>
  <Options name="3_5"              value="USENG_NUMBER_5.wav"     text="5"/>
  <Options name="3_6"              value="USENG_NUMBER_6.wav"     text="6"/>
  <Options name="3_7"              value="USENG_NUMBER_7.wav"     text="7"/>
  <Options name="3_8"              value="USENG_NUMBER_8.wav"     text="8"/>
  <Options name="3_9"              value="USENG_NUMBER_9.wav"     text="9"/>
  <Options name="3_10"             value="USENG_NUMBER_10.wav"    text="10"/>
  <Options name="3_11"             value="USENG_NUMBER_11.wav"    text="11"/>
  <Options name="3_12"             value="USENG_NUMBER_12.wav"    text="12"/>
  <Options name="3_13"             value="USENG_NUMBER_1.wav"     text="1"/>
  <Options name="3_14"             value="USENG_NUMBER_2.wav"     text="2"/>
  <Options name="3_15"             value="USENG_NUMBER_3.wav"     text="3"/>
  <Options name="3_16"             value="USENG_NUMBER_4.wav"     text="4"/>

```

APPENDIX

<Options name="3_17"	value="USENG_NUMBER_5.wav"	text="5"/>
<Options name="3_18"	value="USENG_NUMBER_6.wav"	text="6"/>
<Options name="3_19"	value="USENG_NUMBER_7.wav"	text="7"/>
<Options name="3_20"	value="USENG_NUMBER_8.wav"	text="8"/>
<Options name="3_21"	value="USENG_NUMBER_9.wav"	text="9"/>
<Options name="3_22"	value="USENG_NUMBER_10.wav"	text="10"/>
<Options name="3_23"	value="USENG_NUMBER_11.wav"	text="11"/>
<Options name="3_24"	value="USENG_AMPMTIME_NOON.wav"	text="noon"/>
<Options name="3_25"	value="USENG_AMPMTIME_MIDNIGHT.wav"	
text="midnight"/>		
<Options name="5_0"	value="USENG_AMPMTIME_OCLOCK.wav"	
text="o'clock"/>		
<Options name="5_2"	value="USENG_AMPMTIME_O_1.wav"	text="oh-one"/>
<Options name="5_2"	value="USENG_AMPMTIME_O_2.wav"	text="oh-two"/>
...		
<Options name="5_9"	value="USENG_AMPMTIME_O_9.wav"	text="oh-nine"/>
<Options name="5_10"	value="USENG_NUMBER_10.wav"	text="10"/>
<Options name="5_11"	value="USENG_NUMBER_11.wav"	text="11"/>
...		
<Options name="5_58"	value="USENG_NUMBER_58.wav"	text="58"/>
<Options name="5_59"	value="USENG_NUMBER_59.wav"	text="59"/>
<Options name="6_0"	value="USENG_AMPMTIME_AM.wav"	text="AM"/>
<Options name="6_1"	value="USENG_AMPMTIME_AM.wav"	text="AM"/>
<Options name="6_2"	value="USENG_AMPMTIME_AM.wav"	text="AM"/>
...		
<Options name="6_23"	value="USENG_AMPMTIME_PM.wav"	text="PM"/>
<Options name="6_24"	value="NULL.wav"	text=""/>
<Options name="6_25"	value="NULL.wav"	text=""/>
</DOCUMENT>		

APPENDIX

```
<?xml version="1.0" ?>
```

```
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>
  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
```

```
<DOCUMENT>
```

```
<MenuVariables name="1"      value="26"/>
<MenuVariables name="2"      value="0"/>
<MenuVariables name="3"      value="26"/>
<MenuVariables name="4"      value="0"/>
<MenuVariables name="5"      value="60"/>
<MenuVariables name="6"      value="26"/>
<MenuVariables name="7"      value="0"/>
```

```
<Options name="1_0"      value="SASPAN_AMPMTIME_ALAS.wav"      text="a
las"/>
<Options name="1_1"      value="SASPAN_AMPMTIME_ALA.wav"      text="a la"/>
<Options name="1_2"      value="SASPAN_AMPMTIME_ALAS.wav"      text="a
las"/>
```

```
...
<Options name="1_23"      value="SASPAN_AMPMTIME_ALAS.wav"      text="a
las"/>
<Options name="1_24"      value="SASPAN_AMPMTIME_AL.wav"      text="al"/>
<Options name="1_25"      value="SASPAN_AMPMTIME_ALA.wav"      text="a la"/>
```

```
<Options name="3_0"      value="SASPAN_NUMBER_12.wav"      text="doce"/>
<Options name="3_1"      value="SASPAN_NUMBER_1.wav"      text="una"/>
<Options name="3_2"      value="SASPAN_NUMBER_2.wav"      text="dos"/>
<Options name="3_3"      value="SASPAN_NUMBER_3.wav"      text="tres"/>
```

```
...
<Options name="3_23"      value="SASPAN_NUMBER_11.wav"      text="once"/>
```


APPENDIX

<Options name="3_24"	value="SASPAN_AMPMTIME_NOON.wav" text="mediodia"/>
<Options name="3_25"	value="SASPAN_AMPMTIME_MIDNIGHT.wav"
text="medianoche"/>	
<Options name="5_0"	value="SASPAN_AMPMTIME_ENPUNTO.wav" text="en
punto"/>	
<Options name="5_1"	value="SASPAN_AMPMTIME_Y1.wav" text="y un
minuto"/>	
<Options name="5_2"	value="SASPAN_AMPMTIME_Y2.wav" text="y 2 minutos"/>
...	
<Options name="5_9"	value="SASPAN_AMPMTIME_Y13.wav" text="y 13"/>
<Options name="5_10"	value="SASPAN_AMPMTIME_Y14.wav" text="y 14"/>
<Options name="5_11"	value="SASPAN_AMPMTIME_YCUARTO.wav"
text="y cuarto"/>	
...	
<Options name="5_58"	value="SASPAN_AMPMTIME_Y58.wav" text="y 58"/>
<Options name="5_59"	value="SASPAN_AMPMTIME_Y59.wav" text="y 59"/>
<Options name="6_0"	value="SASPAN_AMPMTIME_MADRUGADA.wav"
text="madrugada"/>	
...	
<Options name="6_5"	value="SASPAN_AMPMTIME_MANA.wav"
text="mana"/>	
...	
<Options name="6_12"	value="SASPAN_AMPMTIME_TARDE.wav"
text="tarde"/>	
...	
<Options name="6_23"	value="SASPAN_AMPMTIME_NOCHE.wav"
text="noche"/>	
<Options name="6_24"	value="NULL.wav" text=""/>
<Options name="6_25"	value="NULL.wav" text=""/>
</DOCUMENT>	

APPENDIX

```
<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>

  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
<DOCUMENT>
  <MenuVariables name="proc"          value="play_at_ampmtime.proc"/>
  <Options name="1"   value="7" text=" LSCP_AT_AMPMTIME.xml "/>
</DOCUMENT>
```

```
<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>

  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
<DOCUMENT>
  <MenuVariables name="proc"          value="play_at_24time.proc"/>
  <Options name="1"   value="4" text="LSCP_AT_24TIME.xml"/>
</DOCUMENT>
```

APPENDIX

```
<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>

  <!ELEMENT MenuVariables (#PCDATA)*>
  <!--ATTLIST MenuVariables name CDATA #REQUIRED
        value CDATA #REQUIRED-->
  <!ELEMENT Options (#PCDATA)*>
  <!--ATTLIST Options name CDATA #REQUIRED
        value CDATA #REQUIRED
        text CDATA #IMPLIED-->
]>
<DOCUMENT>
  <MenuVariables name="proc" value="choose_and_play_at_time.proc"/>
  <Options name="1" value="7" text="LSCP_AT_AMPMTIME.xml"/>
  <Options name="2" value="4" text="LSCP_AT_24TIME.xml"/>
  <Options name="3" value="7" text="LSCP_AT_BEFORETIME.xml"/>
</DOCUMENT>
```

APPENDIX

```
<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>
  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
<DOCUMENT>
<MenuVariables name="1"          value="1"/>
<MenuVariables name="2"          value="1"/>
<Options name="1_0"              value="USENG_MSG_RECEIVED.wav"    text="Message
received"/>
<Options name="2_0"              value="GCP_AT_TIME.xml"
text="GCP_AT_TIME.xml"/>

</DOCUMENT>
```

```
<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>
  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
<DOCUMENT>
<MenuVariables name="1"          value="1"/>
<MenuVariables name="2"          value="1"/>
<Options name="1_0"              value="LSCP_AT_AMPMTIME.xml"
text="GCP_AT_AMPMTIME.xml"/>
<Options name="2_0"              value="JAPAN_MSG_RECEIVED.wav"    text="Japanese for
received message"/>
</DOCUMENT>
```

APPENDIX

```
<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>
  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
<DOCUMENT>
<MenuVariables name="1"          value="1"/>
<MenuVariables name="2"          value="1"/>
<Options name="1_0"              value="USENG_FAX_WILL_SEND.wav" text="Fax will be
sent"/>
<Options name="2_0"              value="LSCP_AT_AMPMTIME.xml"
text="GCP_AT_AMPMTIME.xml"/>
</DOCUMENT>
```

```
<?xml version="1.0" ?>
<!DOCTYPE DOCUMENT [
  <!ELEMENT DOCUMENT (MenuVariables,Options)>
  <!ELEMENT MenuVariables (#PCDATA)*>
  <!ATTLIST MenuVariables name CDATA #REQUIRED
                        value CDATA #REQUIRED>
  <!ELEMENT Options    (#PCDATA)*>
  <!ATTLIST Options name CDATA #REQUIRED
                        value CDATA #REQUIRED
                        text CDATA #IMPLIED>
]>
<DOCUMENT>
<MenuVariables name="1"          value="1"/>
<MenuVariables name="2"          value="1"/>
<Options name="1_0"              value="LSCP_AT_AMPMTIME.xml"
text="GCP_AT_AMPMTIME.xml"/>
<Options name="2_0"              value="JAPAN_FAX_WILL_SEND.wav" text="Japanese for
Fax will be sent"/>
</DOCUMENT>
```